



## Phonak Virto B-Titanium (B90/B70) (M)

Small deep fitting device, battery size 10. For fitting range, product details and available options, please see Product Information or visit [www.phonakpro.com](http://www.phonakpro.com).


Amplification factor M for mild to moderate hearing loss, open fittings, all audiometric configurations.

Phonak Virto B-Titanium devices do not have wireless functionality. Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings.


### Ear simulator data

IEC 60118-0: 1994

#### Output sound pressure level

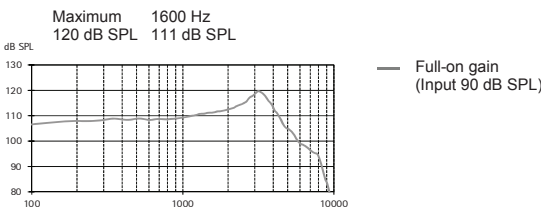


#### Acoustic gain

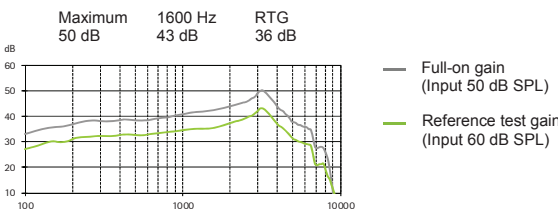

Frequency range	<100 Hz - 8000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2%	2.5%	2%
Battery current	Quiescent	Working	
	0.85 mA	0.95 mA	
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

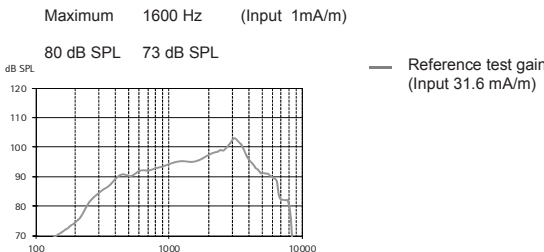


Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artefact resulting from the use of a narrowband input signal and does not affect the actual performance with naturally occurring broadband input signals.

### 2cm<sup>3</sup> coupler data


ANSI/ASA S3.22.2014

IEC 60118-0: 2015

#### Output sound pressure level

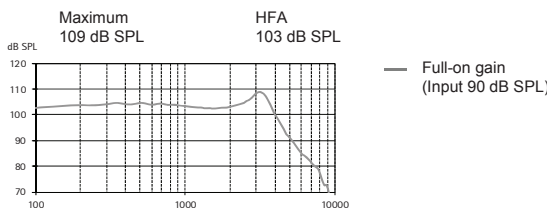


#### Acoustic gain

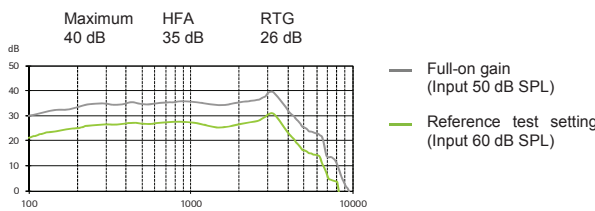

Frequency range	<100 Hz - 7000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1%	1.5%	1%
Battery current	0.95 mA		
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

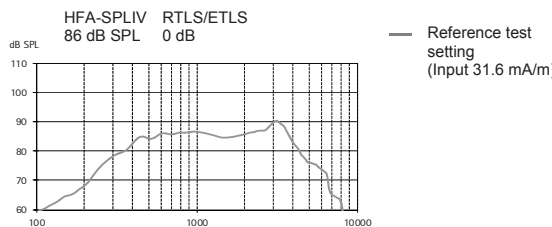

PHONAK

A Sonova brand