

# Vega 8 G4

## WITH BATTERY SIZE 312



### PRODUCT FEATURES

Semi-modular Mini-ITC

Extremely small construction possible because of the vertically standing battery

### BASIC FEATURES

Battery compartment as on/off switch

Push button (integrated in battery compartment lid), can be programmed as a program button, program button with on/off function, volume control, Tinnitus noiser level up/down (only with option Wireless)

Level-dependent signal tones/melodies (activate/deactivate) for low battery voltage, program change, volume control, on/off function

Audiomatic power-on delay (P) (activate/deactivate)

Wax guard HF 3 Black or HF 4 Black

Microphone filter Microsafe

Magnetic battery mounting and changing tool  
Removal line

### OPTIONS



Audiostreamer Smart Connect

Remote control Smart Remote

Remote control Smart Key

Smart Connect App

Smart Remote App

### PROGRAMMING CABLES AND ADAPTER

Cable for HiPro interface, right Art.-No. 029 44 986

Cable for HiPro interface, left Art.-No. 029 44 994

Cable for Noah-Link interface, right Art.-No. 106 02 843

Cable for Noah-Link interface, left Art.-No. 106 02 842

Adapter for HiPro and Noah-Link cable Art. No. 072 02 901

### TECHNICAL FEATURES

24 signal processing channels / 12 frequency channels

12 AGC channels / 12 MPO channels

6 hearing programs

➤ MusicSelect

Data Logging

Wireless optional

➤ AudioLink

➤ Binaural synchronization

➤ Wireless audio streaming

### SIGNAL PROCESSING

Anti-Feedback system

Noise Manager

➤ Adaptive noise reduction

➤ Wiener filter

➤ Impulse suppressor

➤ Auto-situation adaption

Frequency and dynamics concept

➤ TRC S

➤ Selective frequency compression

Programmable Tinnitus function


### AUTOMATIC FUNCTIONS

Comfort365


Acclimatic

Comformatic

### FITTING RANGES



Fitting range 50 dB



Fitting range 55 dB

P = Patent

For more information about features please check out our website [www.audioservice.com](http://www.audioservice.com)

# Vega 8 G4



Gain 50 dB





## MAXIMUM OUTPUT

Input: 90 dB

IEC 60118-7:2005<sup>1)</sup>  
ANSI S3.22-2009<sup>1)</sup>



IEC 60118-0<sup>2)</sup>

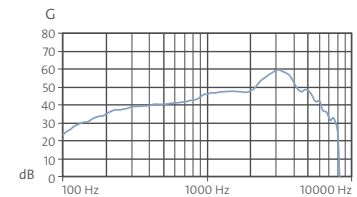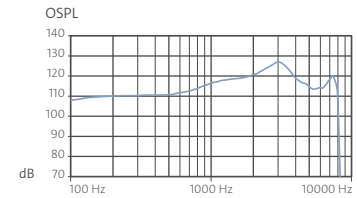

## TECHNICAL INFORMATION

### MAXIMUM OUTPUT

Peak value at 90 dB	118 dB	128 dB
1,600 Hz (RTF)	111 dB	118 dB
HFA (High Frequency Average)	112 dB	115 dB

### FULL ON GAIN

Peak value at 50 dB	50 dB	59 dB
1,600 Hz (RTF)	40 dB	47 dB
HFA (High Frequency Average)	43 dB	45 dB
Reference test gain	35 dB	40 dB

### TECHNICAL FEATURES

Battery type	312	312
Battery life in hours	140	140
Frequency range	100 – 8,000 Hz	150 – 8,250 Hz
Battery current consumption	0.80 mA	0.80 mA
Equivalent noise level	20 dB	19 dB
Tinnitus noiser broadband	70 dB	
Distortion		
500 Hz	2%	3%
800 Hz	1%	2%
1,600 Hz	2%	3%

<sup>1)</sup> Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

<sup>2)</sup> Technical data measured in accordance with IEC 60118-0 at ear simulator



#### WARNING

Small parts present a choking hazard.  
This device is not suitable for fitting to babies, small children or mentally disabled persons.

# Vega 8 G4



Gain 55 dB





## MAXIMUM OUTPUT

Input: 90 dB

IEC 60118-7:2005<sup>1)</sup>  
ANSI S3.22-2009<sup>1)</sup>



IEC 60118-0<sup>2)</sup>

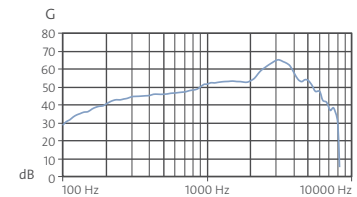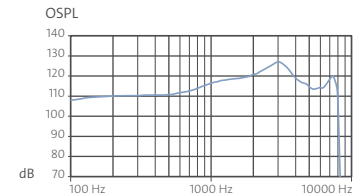

## TECHNICAL INFORMATION

### MAXIMUM OUTPUT

Peak value at 90 dB	118 dB	128 dB
1,600 Hz (RTF)	111 dB	118 dB
HFA (High Frequency Average)	112 dB	115 dB

### FULL ON GAIN

Peak value at 50 dB	55 dB	65 dB
1,600 Hz (RTF)	46 dB	52 dB
HFA (High Frequency Average)	43 dB	45 dB
Reference test gain	42 dB	45 dB

### TECHNICAL FEATURES

Battery type	312	312
Battery life in hours	124	124
Frequency range	100 – 8,000 Hz	150 – 8,250 Hz
Battery current consumption	0.90 mA	0.90 mA
Equivalent noise level	20 dB	19 dB
Tinnitus noiser broadband	75 dB	
Distortion		
500 Hz	2%	3%
800 Hz	1%	2%
1,600 Hz	2%	3%

<sup>1)</sup> Technical data measured in accordance with IEC 60118-7:2005 and ANSI S3.22-2009 at 2 ccm coupler

<sup>2)</sup> Technical data measured in accordance with IEC 60118-0 at ear simulator



#### WARNING

Small parts present a choking hazard.  
This device is not suitable for fitting to babies, small children or mentally disabled persons.

For control ranges and more programming features see Hearing Instrument Simulation of Connexx 8.2 and AudioFit 8.2 or higher.

AS AUDIO-SERVICE GmbH · Alter Postweg 190 · 32584 Löhne · Germany  
info@audioservice.com · www.audioservice.com